





# L-40

## Low Pressure Radiant Heat Brooder



### Wide, Consistent Heating Area

The L-40 produces a wider, more temperature consistent heat zone than leading competitive low pressure brooders, giving birds more options to find their comfort zone.

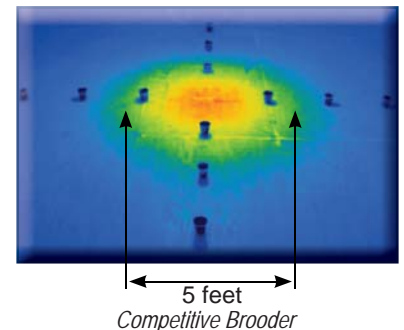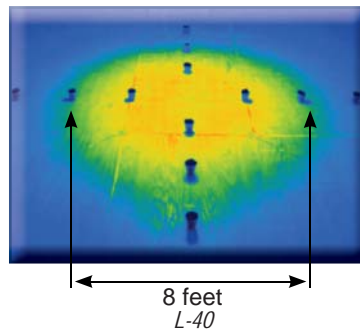


Pictures taken after 5 minutes in identical lab tests. Typical run time of a brooder after pre-heat is 3 to 5 minutes.





### Low Profile

The L-40 is only 14 inches tall and has a lower profile than most other competitive brooders, taking up less room in a house and making it easier to handle and work around.

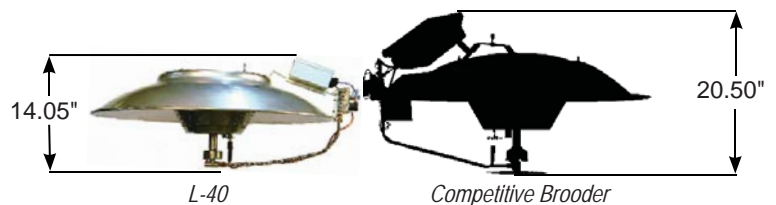

### Energy Efficient

The L-40 utilizes more surface area on its smaller emitter than competitive units, yet creates a bigger heated area on the ground.



# L-40 Low Pressure Radiant Brooder Specifications

<b>Model Numbers</b>	<b>L-40</b>
Input (Btu/h)	40,000
Heater Configurations Available - Spark Ignition	Yes
Installation Height: (ft.) - Broilers - Turkeys	5 - 6 4.5 - 5.5
Center Spacing (ft.)	25 - 40
Inlet Gas Supply Pressure: - Propane (inches of W.C.) - Natural Gas (inches of W.C.)	11 - 14 7 - 14
Fuel Consumption (max.): - Liquid Propane Gas (lbs/hr) - Natural Gas (cu. ft/hr)	1.85 40.0
Ventilation (CFM)	468
Temperature Controls Available: - Wired to House Environmental Control*	Yes
Electrical Requirements: - Spark Ignition	24 VAC / 60HZ
Minimum Clearance to Combustibles (inches) - Top - Side - Below	14 36 54
Dimensions (in.): - Height - Canopy Diameter	14 31.5
Net Weight (lbs.)	13.5
Canopy:	Polished Aluminum
Stainless Steel Radiant Emitter:	S
3/8" x 6' Gas Hose (up to 25 ft.)	O
Regulator (Zone Control Panel):	O
Gas Cock and Piping Hardware:	O
CSA Certified (USA and Canada)	Yes

\* When used with a house environmental control, the L-40 can be operated as an on/off or multiple-stage heating system. 115 VAC/60HZ is required.

S=Standard O=Optional



*Quality heaters you can count on.*

*Your L.B. White Dealer:*

411 Mason Street, Onalaska, WI 54650  
 (800) 345-7200  
 (608) 783-5691  
 (608) 783-6115, fax  
[www.lbwhite.com](http://www.lbwhite.com)

© 2015 L.B. White Company  
 All rights reserved.  
 All specifications are subject  
 to change without notice.